



REDUCER

SUBMITTAL HUSKY SD 4000 SUPER DUTY REDUCING COUPLING

Anaco • 311 Corporate Terrace Cir. • Corona, CA • 92879 • (951) 372-2732

Certifications & Standards

Tested & Certified to:

ASTM C1540

ASTM C564

IAPMO File 6726

Material Specifications:

Clamp: Type 304 AISI stainless steel


Screw: Type 305 AISI or 304L stainless steel 3/8"

Shield: Type 304 AISI stainless steel, corrugated. Shield thickness 0.015

Gasket: The gasket shall be manufactured from a properly vulcanized virgin compound in which the primary elastomer is polychloroprene (neoprene) conforming to ASTM C 564.

The Husky SD 4000 Coupling has been engineered by Anaco to provide a super-duty, all stainless steel coupling, balancing the desire for a more rigid joint with the need to provide a superior positive seal, which can accommodate possible disparities in the No-Hub pipe and fittings. This has been accomplished by manufacturing our coupling with a super-duty corrugated shield of sufficient width to accommodate additional surface-bearing sealing clamps.

All Husky SD 4000 Couplings are designed to be installed with a pre-set torque wrench calibrated at 80-inch pounds to accommodate the 3/8" Hex Head screw.

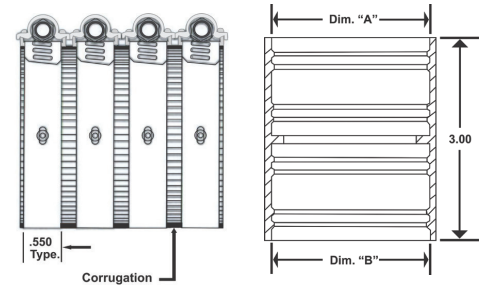

Application Data	
Model	Size
4004	2"x1.5"
4005	3"x2"
4009	4"x3"
4013	4"x2"

Test	Gasket Physical Tests Min. or Max Requirements	ASTM Method
Tensile Strength	1500 psi min.	D 412
Elongation	250 min.	D 412
Durometer (Shore A)	70 +/- 5 @ 76°F +/- 5°F	D 2240
Accelerated Aging	15% maximum tensile and 20% maximum elongation deterioration, 10 points maximum increase in hardness, all determination after oven aging for 96 hours at 158°F	D 573
Compression Set	25% maximum volume change after immersion in IRM 903 for 70 hours at 212°F	D 395 method B
Oil Immersion	80% maximum volume change after immersion in IRM 903 for 70 hours at 212°F	D 471
Ozone Crack	No visible cracking at 2 times magnification of the gasket after 100 hours exposure in 1.5ppm ozone concentration at 100°F. Testing and inspection to be on gasket which is loop mounted to give approximately 20% elongation of outer surface	D 1149
Tear Resistance	150 lbs. minimum per inch of thickness	D 624
Water Absorption	20% maximum by weight after 7 days at 158°F	D 471